

# Barcode Verification Report


<b>91094680</b>			
Date:	4/22/2019	Serial number:	B16A
Time:	3:08:59 PM	Aperture:	0.010"
Software Version:	2.2.4.7815 (UI) 2.2.4.7815 (core)	Wavelength:	2.6E-005" (660 nm.)
		Last Calibrated:	4/22/2019
GS1-128 Content: Fail:        X No leading Function 1			
Number of scans:		10	
Code Type:		Code 128 43 bars + spaces. X dim=0.0222"	
<b>Average Grade (Pass=1.5):</b>		<b>F (0.0) - Fail (0.0/10/660)</b>	
<b>Average Bar Gain (tolerance):</b>		<b>1% (± 33.0%)</b>	
Check Character:		OK (54)	

	Pass Scans	Fail Scans
Structure	1..10	
Left Margin	1..10	
Right Margin		1..10

	Percentage Values	Average Grades
Minimum Reflectance	7%	A (4.0)
Maximum Reflectance	75%	
Threshold	41%	
Symbol Contrast	68%	A (3.9)
Min. Edge Contrast	57%	A (4.0)
Modulation	84%	A (4.0)
Defects	11%	A (4.0)
Decodability	35%	C (1.8)
Decode		F (0.0)



# Dimensional Analysis

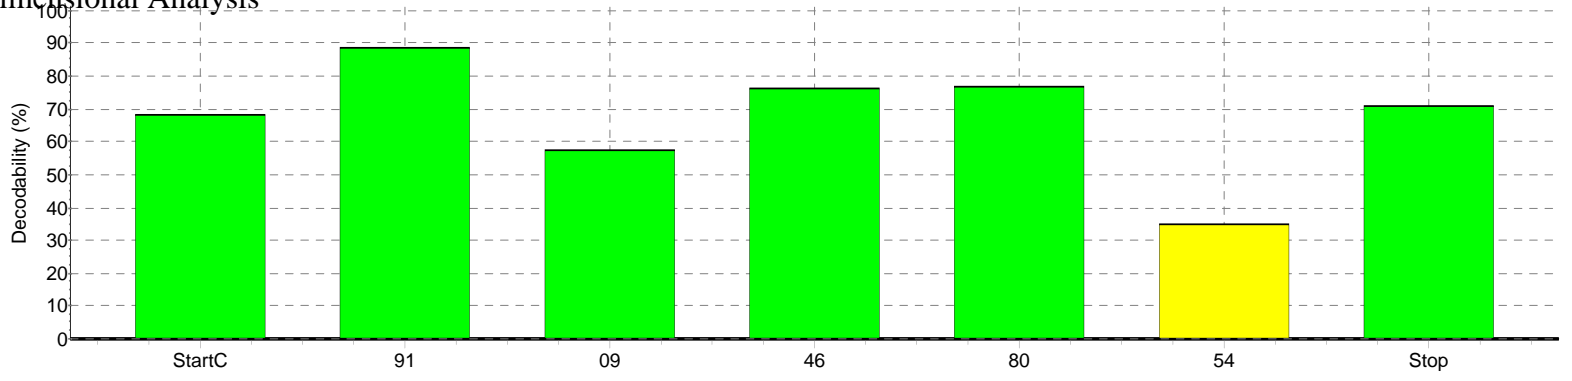

	Decodability	Char. Width	Sum of bars	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge
LM	2704 (2226)								
StartC	68.1%	2464	1359 (1344)	679 (672)	483 (448)	669 (672)	1109 (1120)		
91	88.8%	2499	1784 (1817)	1148 (1136)	673 (681)	676 (681)	673 (681)		
09	57.3%	2356	842 (856)	902 (856)	671 (642)	680 (642)	673 (642)		
46	76.4%	2489	1340 (1357)	439 (452)	878 (905)	1380 (1357)	1137 (1131)		
80	76.6%	2441	1329 (1331)	433 (443)	469 (443)	672 (665)	1339 (1331)		
54	34.9%	2337	1193 (1274)	906 (850)	434 (424)	431 (424)	568 (637)		
Stop	70.8%	2926	1790 (1800)	1139 (1125)	1335 (1350)	867 (900)	435 (450)	468 (450)	660 (675)
RM	1948 (2196)								