


# Barcode Verification Report


<b>191026625</b>			
Date:	1/7/2020	Serial number:	B1DA
Time:	2:19:18 PM	Aperture:	0.010"
Software Version:	2.2.5.7896 (UI) 2.2.4.7815 (core)	Wavelength:	2.6E-005" (660 nm.)
		Last Calibrated:	1/7/2020
GS1-128 Content: Pass: (91)026625			
Number of scans:		10	
Code Type:		GS1-128 49 bars + spaces. X dim=0.0198" (49%)	
<b>Average Grade (Pass=1.5):</b>		<b>F (0.0) - Fail (0.0/10/660)</b>	
<b>Average Bar Gain (tolerance):</b>		<b>0% (± 33.0%)</b>	
Check Character:		OK (63)	

	Pass Scans	Fail Scans
Structure	6	1..5, 7..10
Left Margin	1..4, 6, 8..10	5, 7
Right Margin	1..4, 6, 8..10	5, 7

	Percentage Values	Average Grades
Minimum Reflectance	14%	A (4.0)
Maximum Reflectance	83%	
Threshold	45%	
Symbol Contrast	68%	A (3.9)
Min. Edge Contrast	11%	C (1.5)
Modulation	17%	F (0.4)
Defects	47%	F (0.2)
Decodability	28%	D (1.2)
Decode		F (0.4)

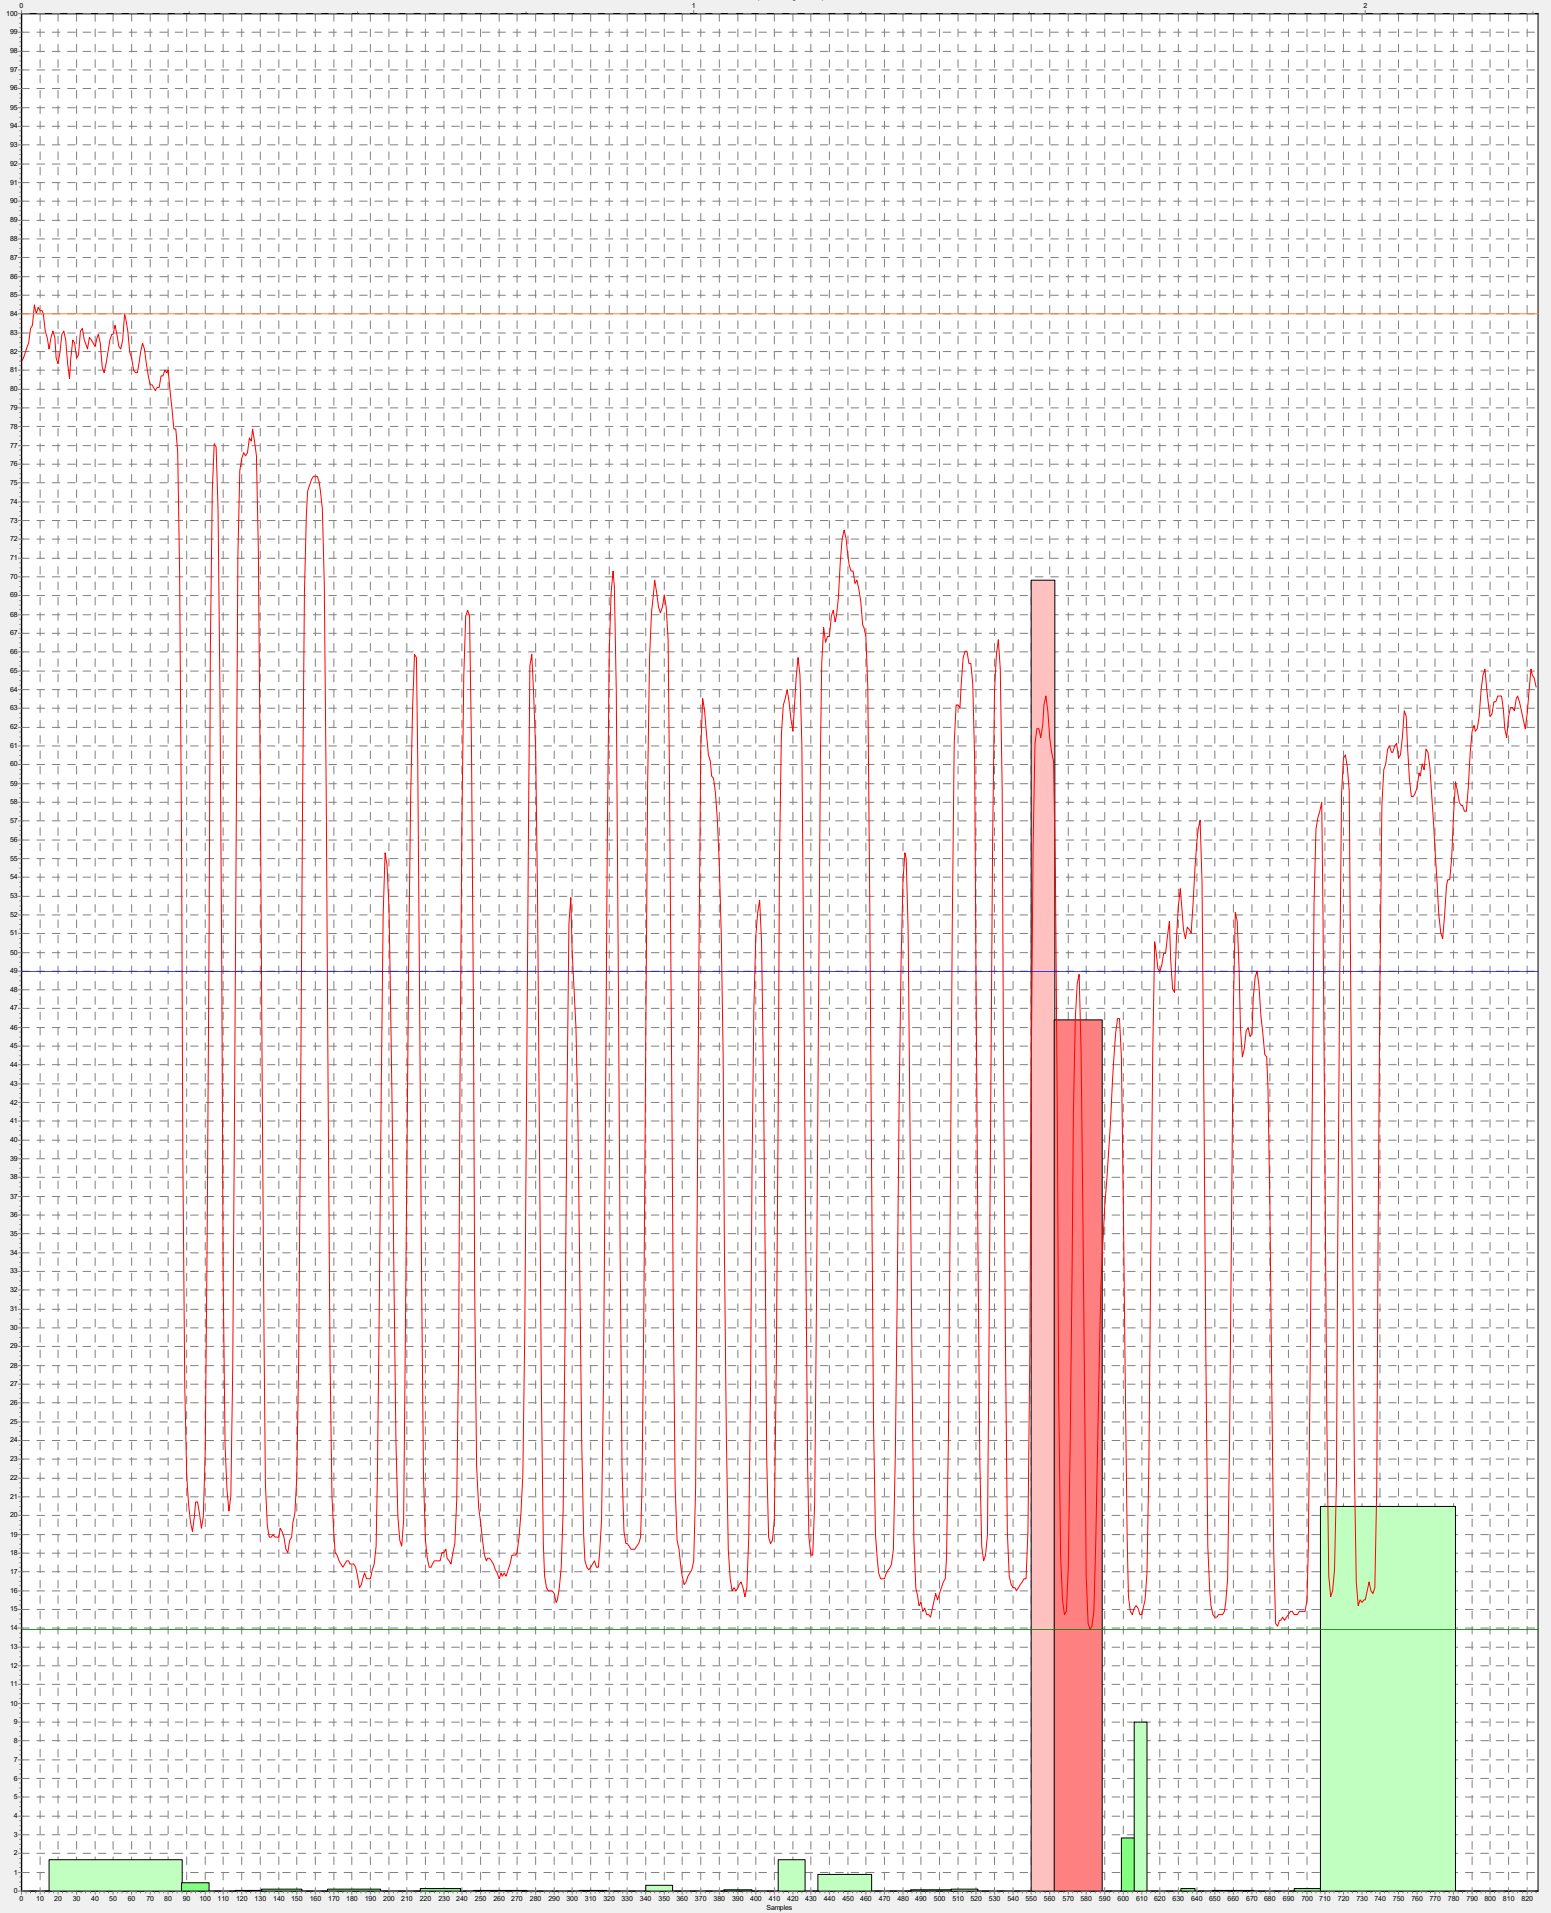

# Dimensional Analysis

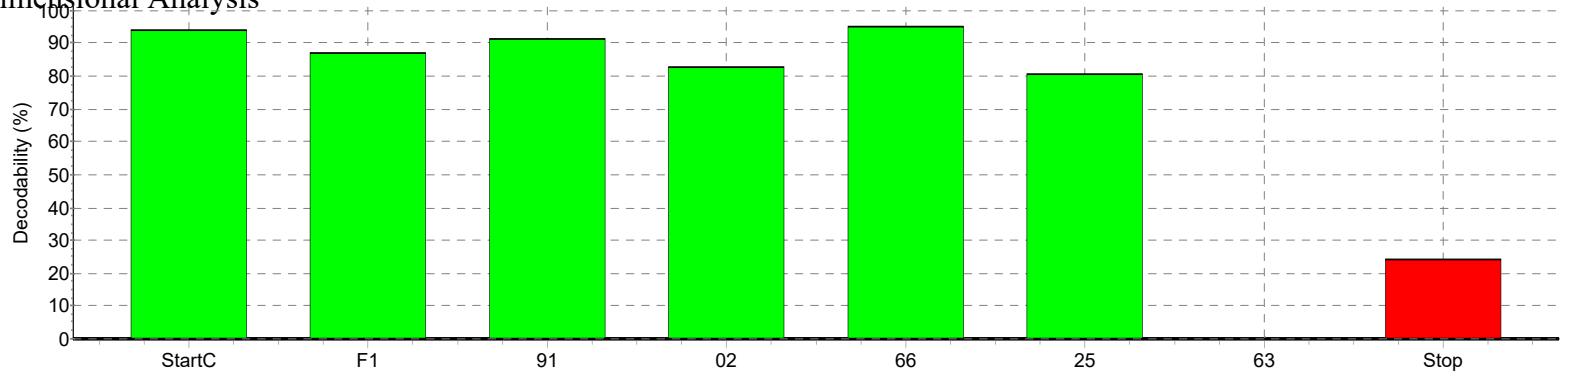

	Decodability	Char. Width	Sum of bars	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge	Edge-Edge
LM	2384 (1971)								
StartC	94.1%	2174	1191 (1185)	593 (592)	397 (394)	594 (592)	982 (987)		
F1	87.0%	2173	1585 (1580)	976 (987)	407 (394)	406 (394)	783 (790)		
91	91.6%	2159	1569 (1570)	973 (981)	587 (589)	595 (589)	596 (589)		
02	83.0%	2169	1200 (1182)	788 (788)	777 (788)	771 (788)	799 (788)		
66	95.1%	2179	807 (792)	595 (594)	596 (594)	985 (990)	1189 (1188)		
25	80.7%	2126	1198 (1159)	985 (966)	596 (579)	401 (386)	593 (579)		
63	0.0%	1376	1033 (500)	801 (250)	235 (250)	207 (375)	256 (500)		
Stop	23.9%	1795	1196 (1104)	513 (690)	319 (828)	471 (552)	876 (276)	810 (276)	400 (414)
RM	2339 (1990)								